






Supports en aluminium

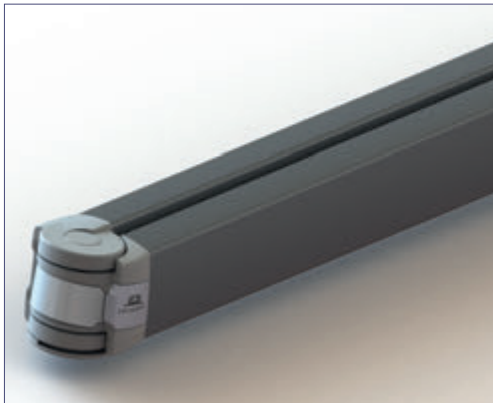

Bras Concept avec chaîne en acier Inox



Illumination LED intégré (en option)

CARACTÉRISTIQUES

DIMENSIONS			
AVANCEE	LARGEUR MINIMUM	LARGEUR MAXIMUM	B. CROISÉS MINIMUM
1500	1800	6000	1060
1750	2050	6000	1190
2000	2380	6000	1350
2250	2630	6000	1480
2500	2890	6000	1610
3000	3470	6000	1900
3500	3970	6000	2150

Treuil intérieure ou moteur

Classe II


Selon Norme EN13561



ÉCHELLE CLASSIFICATION AU VENT							
3000	3500	4000	4500	5000	5500	6000	L A
							1500
							1750
							2000
							2250
							2500
							3000
							3500

49 km/h Classe III 38 km/h Classe II 29 km/h Classe I

INSTALLATION

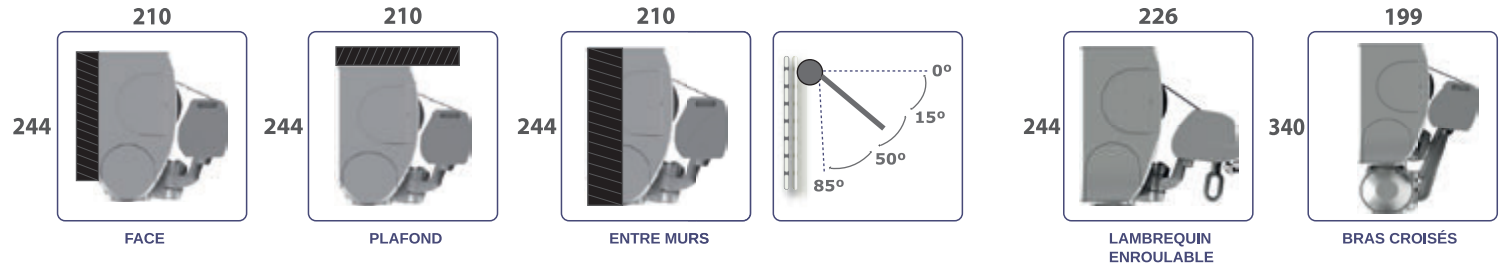

MANŒUVRE



MANUEL



MOTEUR

EN OPTION



LED
(Bras / profil Charge)



BRAS CROISÉS



LAMBREQUIN
ENROULABLE
(Max 5000)



TREUIL
EXTERIEURE

CERTIFIE



MARQUE CE



VISSERIE



LAQUÉ

COULEURS C-1



Blanc



Ral 1013



Ral 7016



Ral 7016
Texturé



Argent
Texturé



Bronze
Texturé



Noir
Texturé



Ral 8014



Ral 8017



Ral 8019



Ral 7035



Inox



Ral 7022



Ral 6005



Ral 6009



Ral 3005

PLUS D'INFORMATIONS
APP



www.mecanotoldo.com