



Perfiles y tapas laterales en aluminio



Toldo cofre de dimensiones reducidas



Brazos Smart con tensión interna

### CARACTERÍSTICAS

MEDIDAS				
SALIDA	LÍNEA MÍNIMA MAQUINA	LÍNEA MÍNIMA MOTOR	LÍNEA MÍNIMA ENTRE PAREDES	LÍNEA MÁXIMA
1250	1541	1524	1616	4500
1500	1793	1776	1868	4500
1750	2047	2030	2122	4500
2000	2375	2358	2450	4500
2250	2627	2610	2702	4500
2500	2879	2862	2954	4500



**Clase II**  
Según norma EN13561




ABACO CLASIFICACION AL VIENTO							
1500	2000	2500	3000	3500	4000	4500	L/s
							1250
							1500
							1750
							2000
							2250
							2500

49 km/h Clase III    38 km/h Clase II    29 km/h Clase I

### INSTALACIÓN

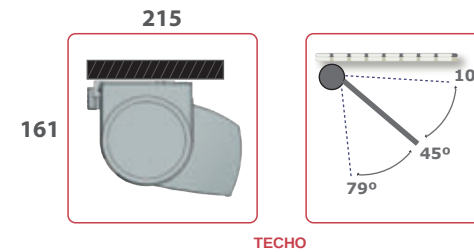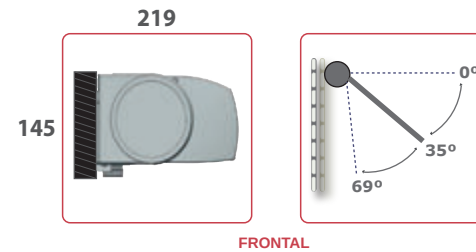

### ACCIONAMIENTO

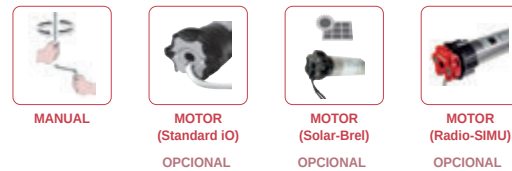

### OPCIONES



### CERTIFICACIONES



### COLORES BASE



### COLORES STANDARD



MÁS INFORMACIÓN APP

